

Remote™TM Ventilation 2900




AXA
RV-2900



Technical specifications

- Applicability: tophung windows
- Quality marks: conforms to all the requirements of PKVW, SKG® and SKH2
- Window dimensions: New: Maximum: 120 x 100 cm (w x h)
Minimum: 30 x 26 cm (w x h)
Existing: Maximum: 100 x 100 cm (w x h)
Minimum: 30 x 26 cm (w x h)
- Housing: painted white or Silverline
- Chain: galvanized steel, single links
- Maximum opening: 120 mm
- Pulling force: 150 N
- Transmission: infra-red
- Code permutations: 4 billion
- Feed unit: 4 x AA penlights (adaptor 6V with 5m wire optional)
- Feed remote control: 2 x AA penlight
- Sensors: Low-Battery indicator (the window always finishes in closed position)
- Screws: 4.5 x 40 mm (5x), 4.0 x 40mm (2X), 5.0 x 60 mm (2x)
- Measurements: vertical transom 45 mm high, horizontal transom 36 mm deep, 285 cm wide

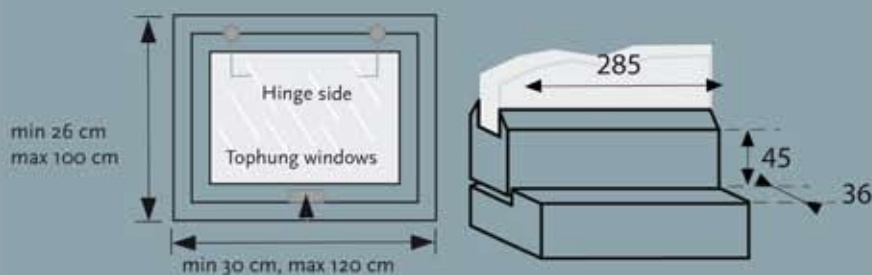

RV 2900 New build



RV 2900 Existing

AXA Remote™ Ventilation 2900

Comfortable

- Inaccessible awning and pivot windows can be operated by a wireless remote control.
- One remote control for all units.

Attractive

- No unattractive wires, thanks to the batteries.
- Slim, white or silver design.

Safe

- Conforms to all the requirements for PKVW, SKG® and SKH2.



- More than 4 billion different codes.

AXA

Stenman Holland B.V.

P.O Box 47

3900 AA Veenendaal (NL)

Phone: +31 (0) 318 53 61 11

Fax: +31 (0) 318 52 20 69

www.axa-hang-sluitwerk.nl



Remote™ Ventilation 2900

Remote controlled window closer



Ventilation

Good and healthy air is very important for the residents of a house. This can be achieved by good ventilation which allows dirty air, as well as moisture, a breeding ground for fungi and house mites, to leave the residence.

Difficult to reach

Good ventilation can be obtained with awning windows. Operating awning windows is not always simple. Sometimes there is a worktop in front of the window or the window is above a door. A reason to leave the window closed. But this is not necessary anymore!

Remote™ Ventilation 2900

With the new Remote™ Ventilation 2900 (RV) 2900 AXA has tackled the problem at the roots: accessibility. The RV 2900 is a remote controlled window cam stay which opens and closes the window. The window can be opened and closed with a compact remote control, even from the comfort of your armchair.

Tophung windows, operated by a remote control		
Material	Maximum opening in mm	Article number
Plastic white	120	2900-00-98
Silverline plastic lacquered	120	2900-00-90

Police Hallmark Safe Housing

And that is not all. The AXA Remote™ Ventilation 2900 is also a very safe product. It makes use of more than 4 billion different codes and someone else being able to open your window with another remote control is impossible. Moreover the RV-2900 with SKG* complies with all the requirements that PHVW, SKG and SKH have set regarding burglary protection and can be applied to windows of 120 cm x 100 cm (existing 100 cm x 100 cm).

Programmable

If there are several awning windows in the house the various units can be programmed so that all the windows can be operated with the same remote control unit. Caution: a maximum of one Remote™ Ventilation per awning window.

Self-supporting

The AXA RV-2900 is completely self-supporting when it comes to the power supply. 4 AA penlight batteries are used. Annoying and unattractive wires are not necessary. Is wiring not a problem? The RV-2900 can also be powered by the 220 - 230V mains via an optional adaptor.

Assembly

The AXA Remote™ Ventilation is quick and easy to assemble. Sturdy attachment is guaranteed when using the drilling template, screws and the ability to readjust the unit.

The AXA Remote™ Ventilation 2900: Refreshing, Comfortable and Safe.

Adaptor		
Material	Length of wire	Article number
Plastic white	5 meter	2900-01-98

